
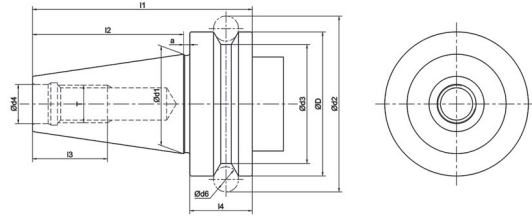


TOOL HOLDERS

NBT

NBT Taper Standard

NBT 锥柄标准




Size	D	d1	d2	d3	d4	d5	d6	l1	l2	l3	l4	a	T
NBT30	46	31.75	56.144	38	12.5	16.1	8	70.4	48.4	24	20	2	M12×1.75
NBT40	63	44.45	75.679	53	17	16.1	10	92.4	65.4	30	25	2	M16×2.0
NBT50	100	69.85	119.019	85	25	25.7	15	139.8	101.8	45	35	3	M24×3.0

Material: Alloyed case hardened steel
Surface Treatment: Blackening and Bright
Taper tolerance: <AT3
Hardness: HRC 56-60
Carbon depth: 0.8±0.2mm
Surface Roughness: Ra<0.2µm
Balancing: G2.5/25000
Cooling: AD

ER Collet Chuck
ER 弹簧夹头刀柄

DIN6499	A ↗ ≤0.003	RPM G2.5/25000	AD
---------	------------	----------------	----

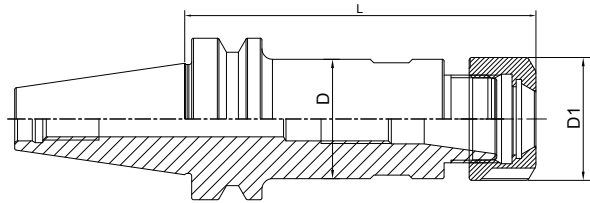


Size	D	D1	L	Capacity
NBT30-ER25-70	42	42	70	2-16
NBT30-ER32-70	50	50	70	2-20
NBT40-ER25-70	42	42	70	2-16
NBT40-ER32-70	50	50	70	2-20

NBT

ER Collet Chuck
ER 弹簧夹头刀柄

DIN6499	A ↗ ≤0.003	RPM G2.5/25000	AD
---------	------------	----------------	----

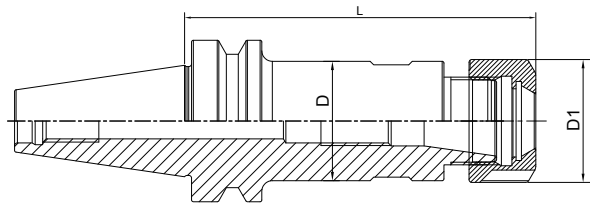

Size	D	D1	L	Capacity
NBT30-ER16-60	28	28	60	1-10
NBT30-ER20-60	34	34	60	1-13
NBT40-ER16-70	28	28	70	1-10
NBT40-ER20-70	34	34	70	1-13


High Speed SKS Collet Chuck

SKS 高速筒夹刀柄

A ↗
≤0.003

RPM
G2.5/25000

AD

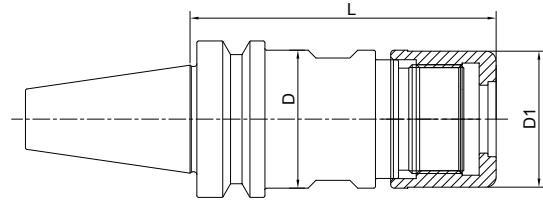

Size	D	D1	L	Capacity	M
NBT30-SKS10-60	27.5	27.1	60	3-10	M21.5*1.0
NBT30-SKS16-60	40.6	40	60	4-16	M32*1.5